

HIGH EFFICIENCY & HIGH PERFORMANCE

Introducing the ARWANA Submersible Pump

A GREAT RANGE OF
4" SUPER STAINLESS
STEEL SUBMERSIBLE
DEEP WELL PUMPS



BASIC FEATURES

- Non-polluting, corrosion resistant stainless steel construction — inside and out.
- The built-in jam-free stainless steel check valve will effectively prevent backflow of water in the pipe from affecting pump performance when the motor is not operating.
- Precision stainless steel intermediate chamber can help maintain optimum performance even when pressure is greatest.
- The high-performance, highly efficient stainless steel impellers are one of the special features of the ARWANA. It is incomparably superior to ordinary plastic or brass impellers in terms of abrasion resistance and service life.
- The stainless steel strainer can prevent the entry of sand or other extraneous material.
- The smooth safety hook will prevent the cable from abrading.

continued next page

2 YEAR WARRANTY!


CONSTRUCTION MATERIAL

Model	SP-5,10 & 18	SP-25	SP-40 & SP-75
Discharge	1-1/4"	1-1/2"	2"
Pump Ext. Diam.	4"(98.5mm)	4"(98.5mm)	4"(98.5mm)
Stages & Impeller	#304 SST	#304 SST	#304 SST
Pump Shaft	#304 SST	#304 SST	#431 SST
Pump Bearing	Buna-N Rubber	Buna-N Rubber	Buna-N Rubber
Lead Guard	#304 SST	#304 SST	#304 SST
Strainer & Check Valve	#304 SST	#304 SST	#304 SST

Built to International Standards


Performance Curves

MODEL	STAGES	KW	HP
SP-0514	14	0.37	0.5
SP-0521	21	0.55	0.75
SP-0528	28	0.75	1
SP-0536	36	1.1	1.5
SP-0542	42	1.1	1.5
SP-1009	9	0.37	0.5
SP-1013	13	0.55	0.75
SP-1018	18	0.75	1
SP-1023	23	1.1	1.5
SP-1028	28	1.5	2
SP-1033	33	1.5	2
SP-1040	40	2.2	3
SP-1048	48	2.2	3
SP-1806	6	0.37	0.5
SP-1809	9	0.55	0.75
SP-1812	12	0.75	1
SP-1815	15	1.1	1.5
SP-1818	18	1.1	1.5
SP-1822	22	1.5	2
SP-1825	25	1.5	2
SP-1833	33	2.2	3
SP-1845	45	3.7	5
SP-1852	52	3.7	5

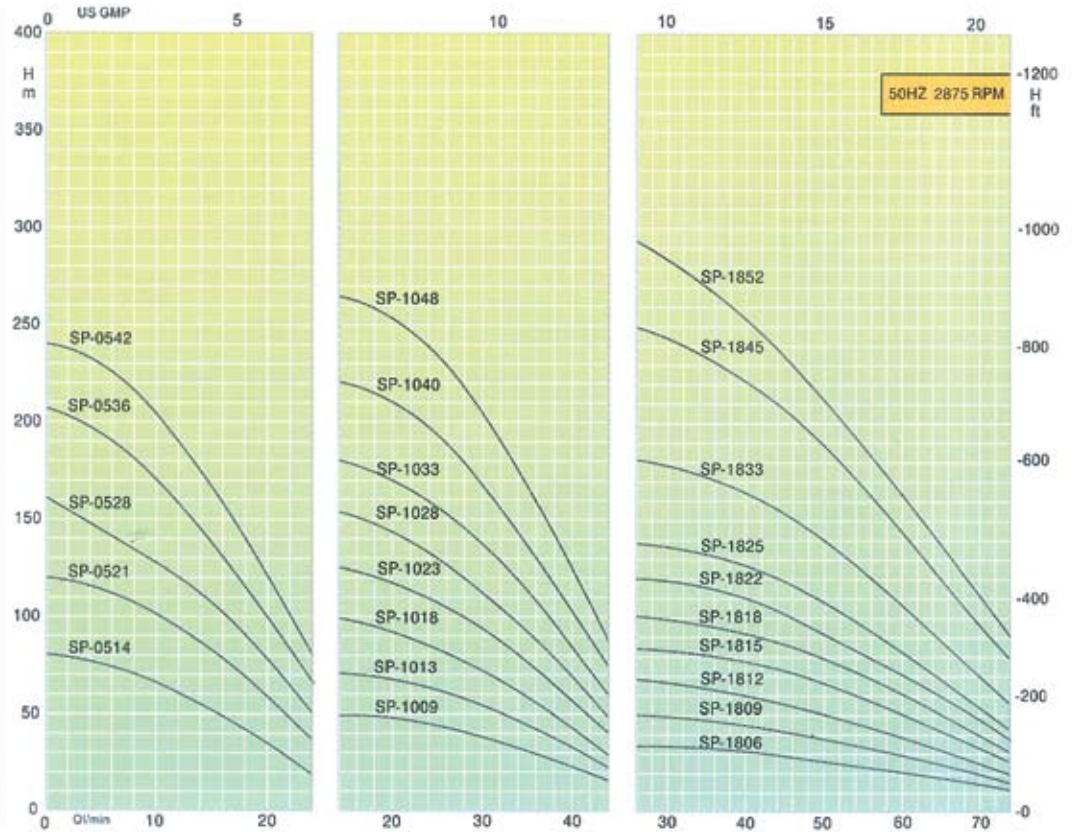

Performance Curves

MODEL	STAGES	KW	HP
SP-2504	4	0.37	0.5
SP-2506	6	0.55	0.75
SP-2508	8	0.75	1
SP-2512	12	1.1	1.5
SP-2517	17	1.5	2
SP-2521	21	2.2	3
SP-2525	25	2.2	3
SP-2533	33	3.7	5
SP-2542	42	3.7	5
SP-4005	5	0.75	1
SP-4007	7	1.1	1.5
SP-4010	10	1.5	2
SP-4012	12	2.2	3
SP-4015	15	2.2	3
SP-4018	18	3.0	4
SP-4021	21	3.7	5
SP-4025	25	3.7	5
SP-4030	30	5.5	7.5
SP-4037	37	5.5	7.5
SP-7505	5	1.5	2
SP-7507	7	2.2	3
SP-7510	10	3.7	5
SP-7513	13	3.7	5
SP-7518	18	5.5	7.5
SP-7525	25	7.5	10

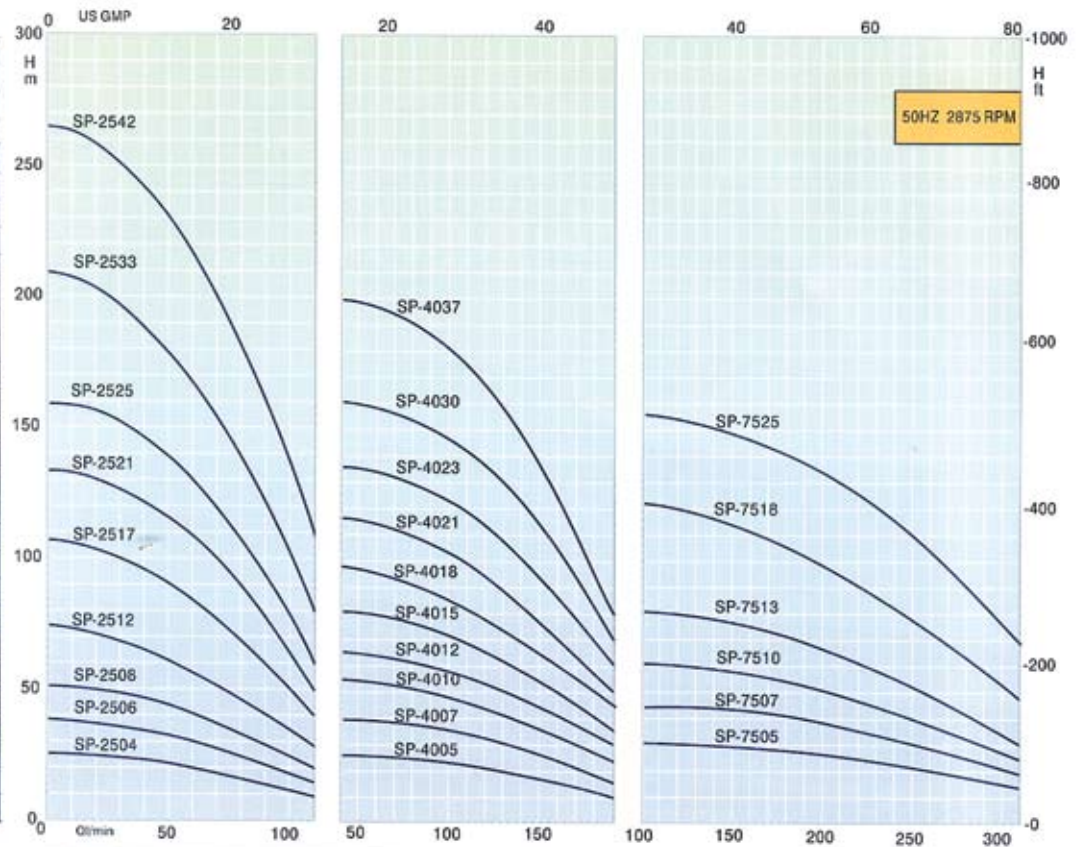

41 Floyd Street, Trigg, Western Australia 6029

OFFICE 1300 734 300 FAX (08) 9467 6291

EMAIL: freewater@virginbores.com.au WEB: www.virginbores.com.au